



HZ 01 Flat csK head with ribs 6-lobe recess self drilling screw with wings, hardened, zinc plated



TECHNICAL DATA SHEET

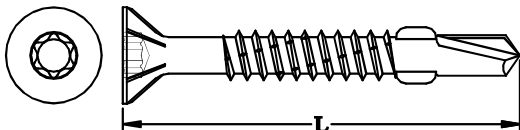

A	Wrench size
L	Overall screw length
D	Outside screw diameter
Mt	Breaking torque moment



Coating:
 Case hardened carbon steel
 Surface coating: Zinc plated min 5 µm (CrVI free)
 Neutral salt spray test resistance (UNI ISO 9227)



material information

Superficial hardness:	Hv 0,3> 530
Core hardness:	320<Hv 0,3<400
Case depth:	0,10 - 0,23 mm - fino a Ø5,5
	0,15 - 0,28 mm - Ø6,3
Neutral salt spray corrosion resistance:	48 h

TECHNICAL DATA HZ 01

Item Code	Screw Size <i>D x L (mm)</i>	A <i>(mm)</i>	Mt <i>(Nm)</i>
Ø 4,2 - T-25 - Drilling capacity: max 3 mm			
HZ 01 42 032	4,2 x 32	9,14 - 9,50	4,7 min
HZ 01 42 045	4,2 x 45		
Ø 4,8 - T-25 - Drilling capacity: max 4 mm			
HZ 01 48 038	4,8 x 38	9,14 - 9,50	6,9 min
HZ 01 48 045	4,8 x 45		
HZ 01 48 060	4,8 x 60		
HZ 01 48 070	4,8 x 70 / 60		
HZ 01 48 080	4,8 x 80 / 60		
HZ 01 48 100	4,8 x 100 / 70		
Ø 5,5 - T-30 - Drilling capacity: max 5 mm			
HZ 01 55 038	5,5 x 38	11,97 - 12,40	10,4 min
HZ 01 55 045	5,5 x 45		
HZ 01 55 050	5,5 x 50		
HZ 01 55 060	5,5 x 60		
HZ 01 55 070	5,5 x 70 / 60		
HZ 01 55 080	5,5 x 80 / 60		
HZ 01 55 100	5,5 x 100 / 70		
Ø 6,3 - T-30 - Drilling capacity: max 8 mm			
HZ 01 63 040	6,3 x 40	11,97 - 12,40	16,9 min
HZ 01 63 050	6,3 x 50		
HZ 01 63 055	6,3 x 55		
HZ 01 63 060	6,3 x 60		
HZ 01 63 065	6,3 x 65		
HZ 01 63 070	6,3 x 70 / 60		
HZ 01 63 080	6,3 x 80 / 60		
HZ 01 63 100	6,3 x 100 / 70		
HZ 01 63 120	6,3 x 120 / 70		