

CT-CLIP



Base with cable tie for fixing stiff plastic/
metal cable conduits from 16 to 63 mm



Features and benefits

- Ideal fixing with pan head screw. Version available both for universal anchor T6 (VKC) and for universal heavy-duty Bluefix anchor (KS).
- Handy slotted hole for fixing applications with different kinds of light-duty anchors (M6 size) on various materials
- Can be fixed on different bases with the SPIT PULSA gas nailer (with E type guide)
- Versatile fixing applications on a broad range of diameters and electric system conduits

Technical data

Material: grey RAL 7035 polyamide 6.6

Installation temperature: -5°C ÷ 35°C

Operating temperature: -40°C ÷ +70°C

Flammability rating: HB according to UL 94

Glow-wire test: 650°C according to IEC 60695-2-12


Minimum tensile strength: 360 N

Technical Info and Certifications



Tested according to Standard CEI EN 62275
Cable management systems
Cable ties for electric installations

Installation

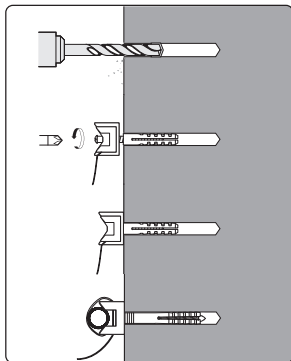

CT-CLIP

Description	Total length (mm)	min/max torque Ø	Base width (mm)	Base length (mm)	Tightness (N)	Package (pcs)	Code
CT-CLIP 16-32	180	16 ÷ 32	16	24.5	360	100	565510
CT-CLIP 40-63	280	40 ÷ 63	16	40.5	360	100	565511

Recommended fixings



Try it with **T6** and the
flat **HEAD SCREW**

- + It adheres **PERFECTLY** in the **CT-CLIP** eye hook
- + **WITHOUT BREAKING** the support