



Open clip for fixing of metric insulating pipes
in electrical installations

HALOGEN FREE




APPLICATION

- Fixing of insulating pipes

MATERIALI

- Anchor body:
Polypropylen, gray RAL 7035
- Flammability rating:
UL 94 class HB
- Burning properties:
650 °C according IEC 60695-2-12

INSTALLATION

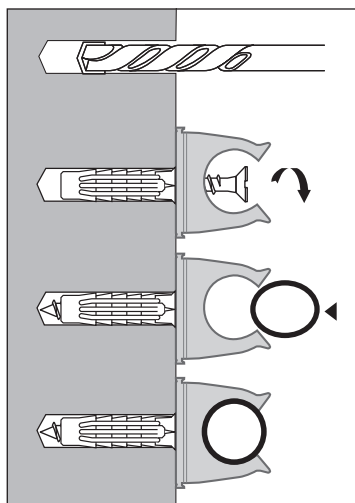

INSTALLATION TEMPERATURE

Installation temperature:

-5°C ÷ +35°C

Working temperature:

-30°C ÷ +55°C

COLOR

Gray

Technical Data

Anchor size	Ø Internal (mm)	Length (mm)	Width (mm)	Passage (mm)	Ø Pipe (mm)	Box pz	Carton pz	Code
ECLIP 16	15	22	16	10,5	16	100	1.000	13502116
ECLIP 20	19	28	16	12,5	20	100	1.200	13502120
ECLIP 25	24	34	16	15,0	25	100	1.200	13502125
ECLIP 32	30	41	16	20,0	32	50	50	13502132
ECLIP 40	38	48	16	25,0	40	50	50	13502140
ECLIP 50	48	59	16	32,5	50	50	50	13502150

Loads on insertion and retention (kN)

Type	Axial Load N_{rec}
ECLIP 16	0,08
ECLIP 20	0,09
ECLIP 25	0,09
ECLIP 32	0,06
ECLIP 40	0,07
ECLIP 50	0,05

Type	Axial Load N_{rec}
ECLIP 16	0,06
ECLIP 20	0,07
ECLIP 25	0,06
ECLIP 32	0,09
ECLIP 40	0,07
ECLIP 50	0,07